


CIR-BA31FB

Weatherproof IR Camera

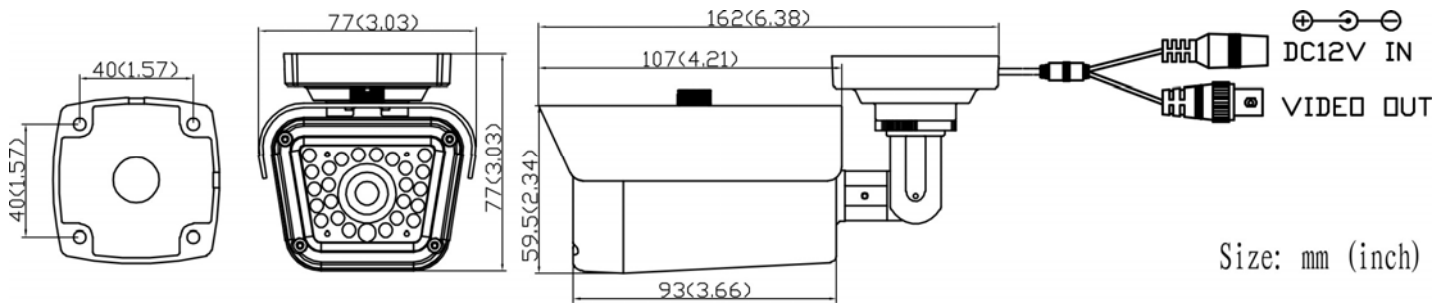

● FEATURES

1. 520TVL, 1/3" 760H CCD
2. 3.6mm Board lens
3. Color changes to B/W while IR LED starts working
4. Constant current circuit design to make sure the lifespan of IR LED
5. Cable management: cable through bracket, fit for ceiling/wall/base mount
6. Viewing angle: Diagonal:93°/ Horizontal:74°/ Vertical:56°
7. Maximum Outdoor IR Range: 15M

Remark: Non-regulative adaptor may cause camera damaged.

● ACCESSORIES

- User ManualX1
- Screw.....X4
- Plastic-Conical-Anchor.....X4
- Hexagonal Wrench.....X2
- Mounting drawing paper..... X1
- DC Connector.....X1

● SPECIFICATION

Item	CIR-BA31FB
IP rating	IP66
Filter	Three Layers Crystal
Image Sensor	1/3"760H CCD
Pixels	NTSC:811(H)×508(V) PAL:795(H)×596(V)
Horizontal Resolution	520 TVL
IR LED	24PCs Special IR LED
Vertical frequency	NTSC:60Hz PAL:50Hz
Horizontal Frequency	NTSC:15.734KHz PAL:15.625KHz
Clock Frequency	NTSC:28.636MHz PAL:28.375MHz
Scanning System	2:1 Interlace
S / N Ratio	≥48dB
Electronic Shutter	NTSC:1/60-1/100,000s PAL:1/50-1/100,000s
White Balance	ATW
Back Light Compensation	ON
Auto Gain Control	ON
Gamma	0.45
Video Output	1V p-p,75Ω
Lens	3.6mm Board lens
Viewing Angle	Diagonal:93° / Horizontal:74° / Vertical:56°
Power Supply	DC12V ±10%
Current Consumption	240mA (Max)
Available IR Distance	15m (49.2ft) (Outdoor)
Dimension	162×77×77mm (6.38"×3.03"×3.03")
Weight	450g
Storage Temperature	-30~+60℃ (-22~+140°F)
Operating Temperature	-30~+40℃ (-22~+104°F)
Package	30PCs/CTN 12.7KGs 420×360×460mm(1.37×1.18×1.5ft)

● PACKAGE

Weight450g
 Dimension 162×77×77mm
 Quantity per carton30PCs
 Dimension of carton.....420×360×460mm
 Weight of carton.....15.3KGs